Workshop Pole Barn: Plans and Elevations


Floor plan, loft plan, and all four elevations · 32 × 48 ft · 16 ft eave · gambrel · numbered markers match the legend below

Drawn from the design model at 32 × 48 ft, so the posts, trusses, doors, and windows fall where the dimensions say. The drawings show the design intent for the engineer and the truss plant; they are not construction documents. North is up in the plans. The compass and the scale bar give the direction and the size.

Build Marker Legend


Marker	Component	Notes
1	3-ply 2×8 laminated post on a wet-set bracket	Sidewalls at 8-8-8-8-8-8 ft; the west gable at 8 ft; two door-jamb posts on the east gable
2	14′ × 14′ insulated overhead door	Wind rated for 115 mph, R-12 or better, centered on the east gable
3	3070 insulated walk door	South sidewall, near the east end
4	Stair landing, 4′ × 4′, at the southwest corner	Between the first and second flights
5	Loft floor opening, about 4′ × 8′, at the west wall	Where the second flight enters the loft: tell the truss plant
6	Wood stove pad (location to be chosen)	Non-combustible base; Class A chimney through the wall or the roof
7	200 A electrical sub-panel	East wall inside, south of the main door
8	Mini-split condenser pad	Outside the west or the south wall (the owner's pick)
9	5′ × 6′ loft double doors	East gable, centered above the main door at loft level
10	14′ × 10′ landing deck at loft level	Free-standing on 4 PT posts to pier footings
11	Cantilevered hoist beam (W6 I-beam)	Projects about 3 ft east of the loft doors, about 9 ft inside
12	Concrete apron (camper approach)	14 ft wide, 10–20 ft east of the main door
13	200 A sub-feed conduit	Underground, from the south (the pump house is about 29 ft away); the source is to be confirmed
14	Snow guards on the lower slope	Over the walk door, on the south slope
15	Windows: 7 in all	3 in the north wall and 3 in the south wall, 4′ × 3′ sliders with the sill 5′ above the floor; one 3′ × 4′ single-hung in the west gable at the loft

Floor Plan (Main Level)

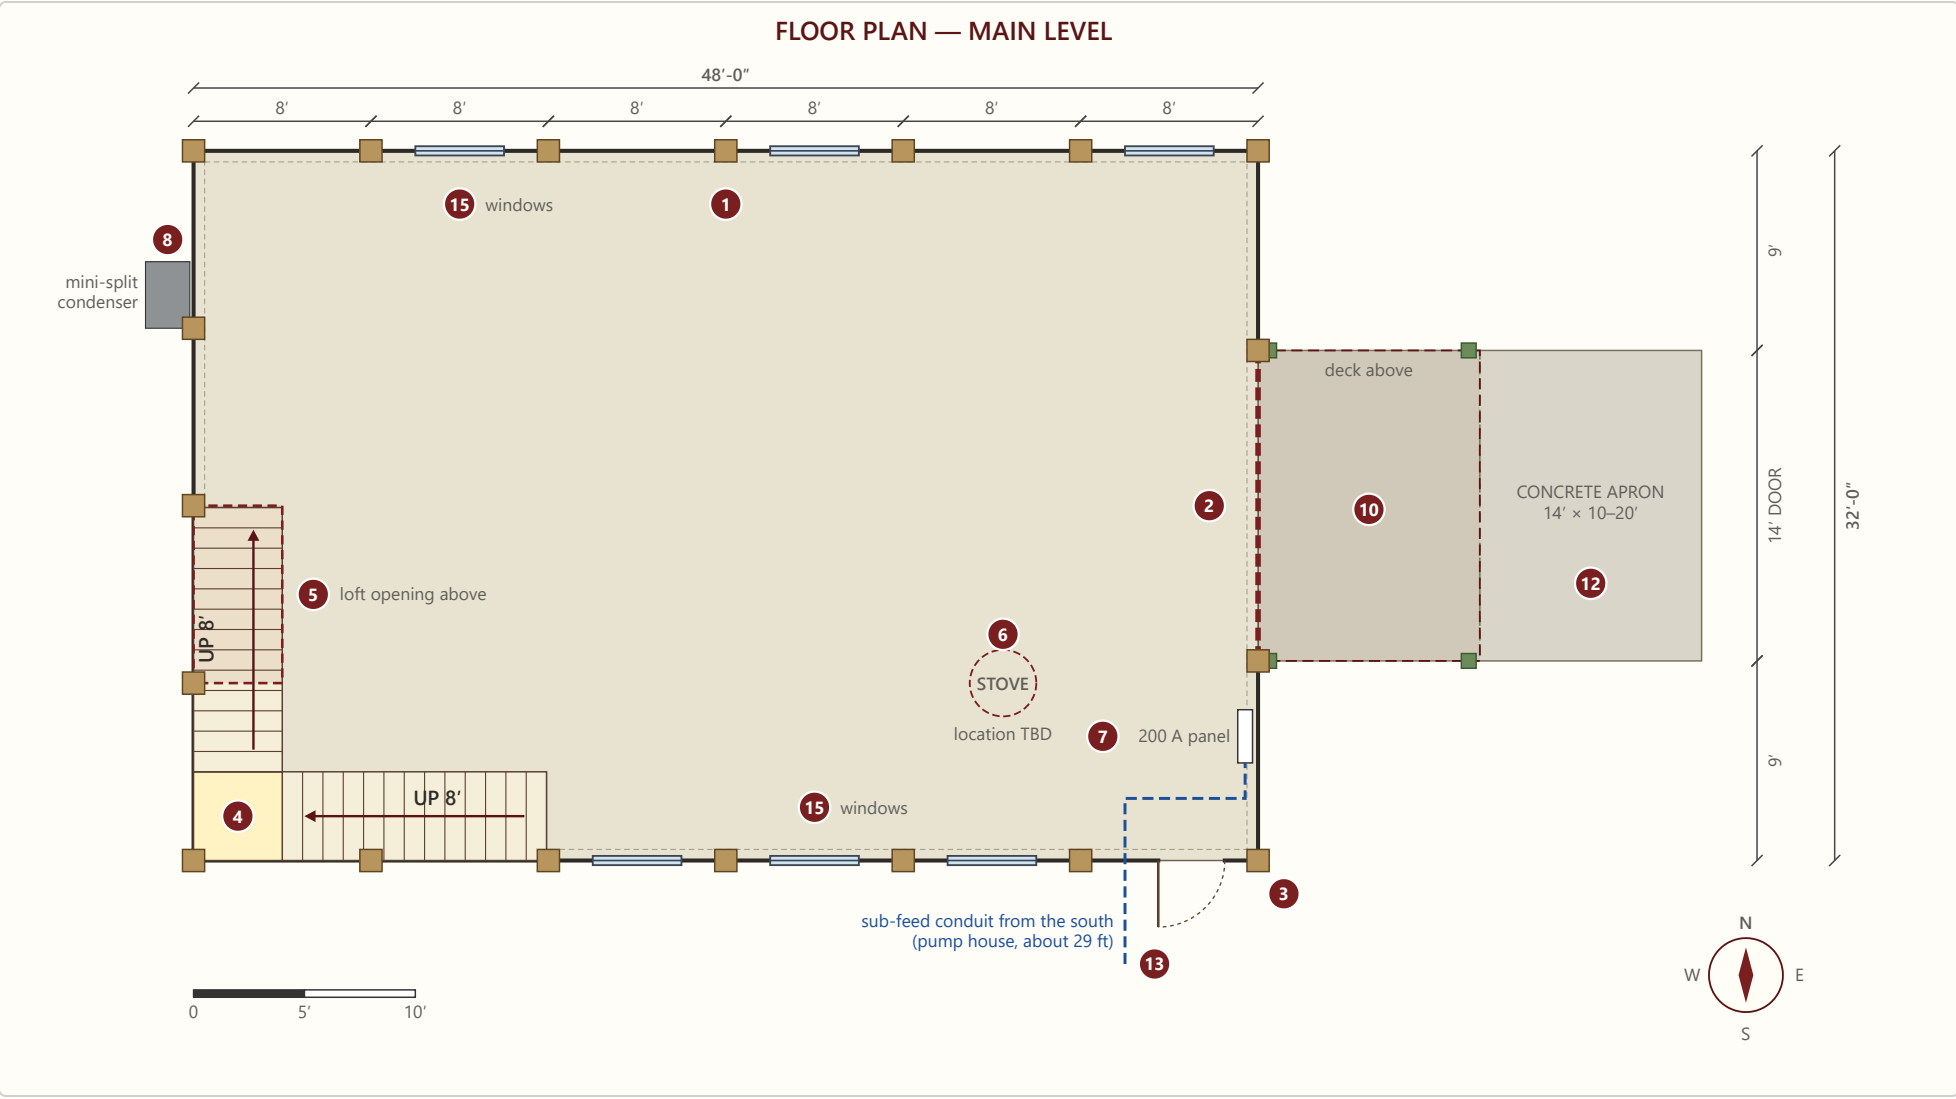


Floor plan, main level. Posts are filled squares, drawn larger than they are. The windows (marker 15) sit in the middle of their bays: three in the north wall and three in the south wall. The dashed outline over the apron is the deck above. The stair's second flight climbs north along the west wall to the dashed opening in the loft floor. The east wall dimensions are the 9′ + 14′ door + 9′ that add up to the 32′ width.

Loft Plan

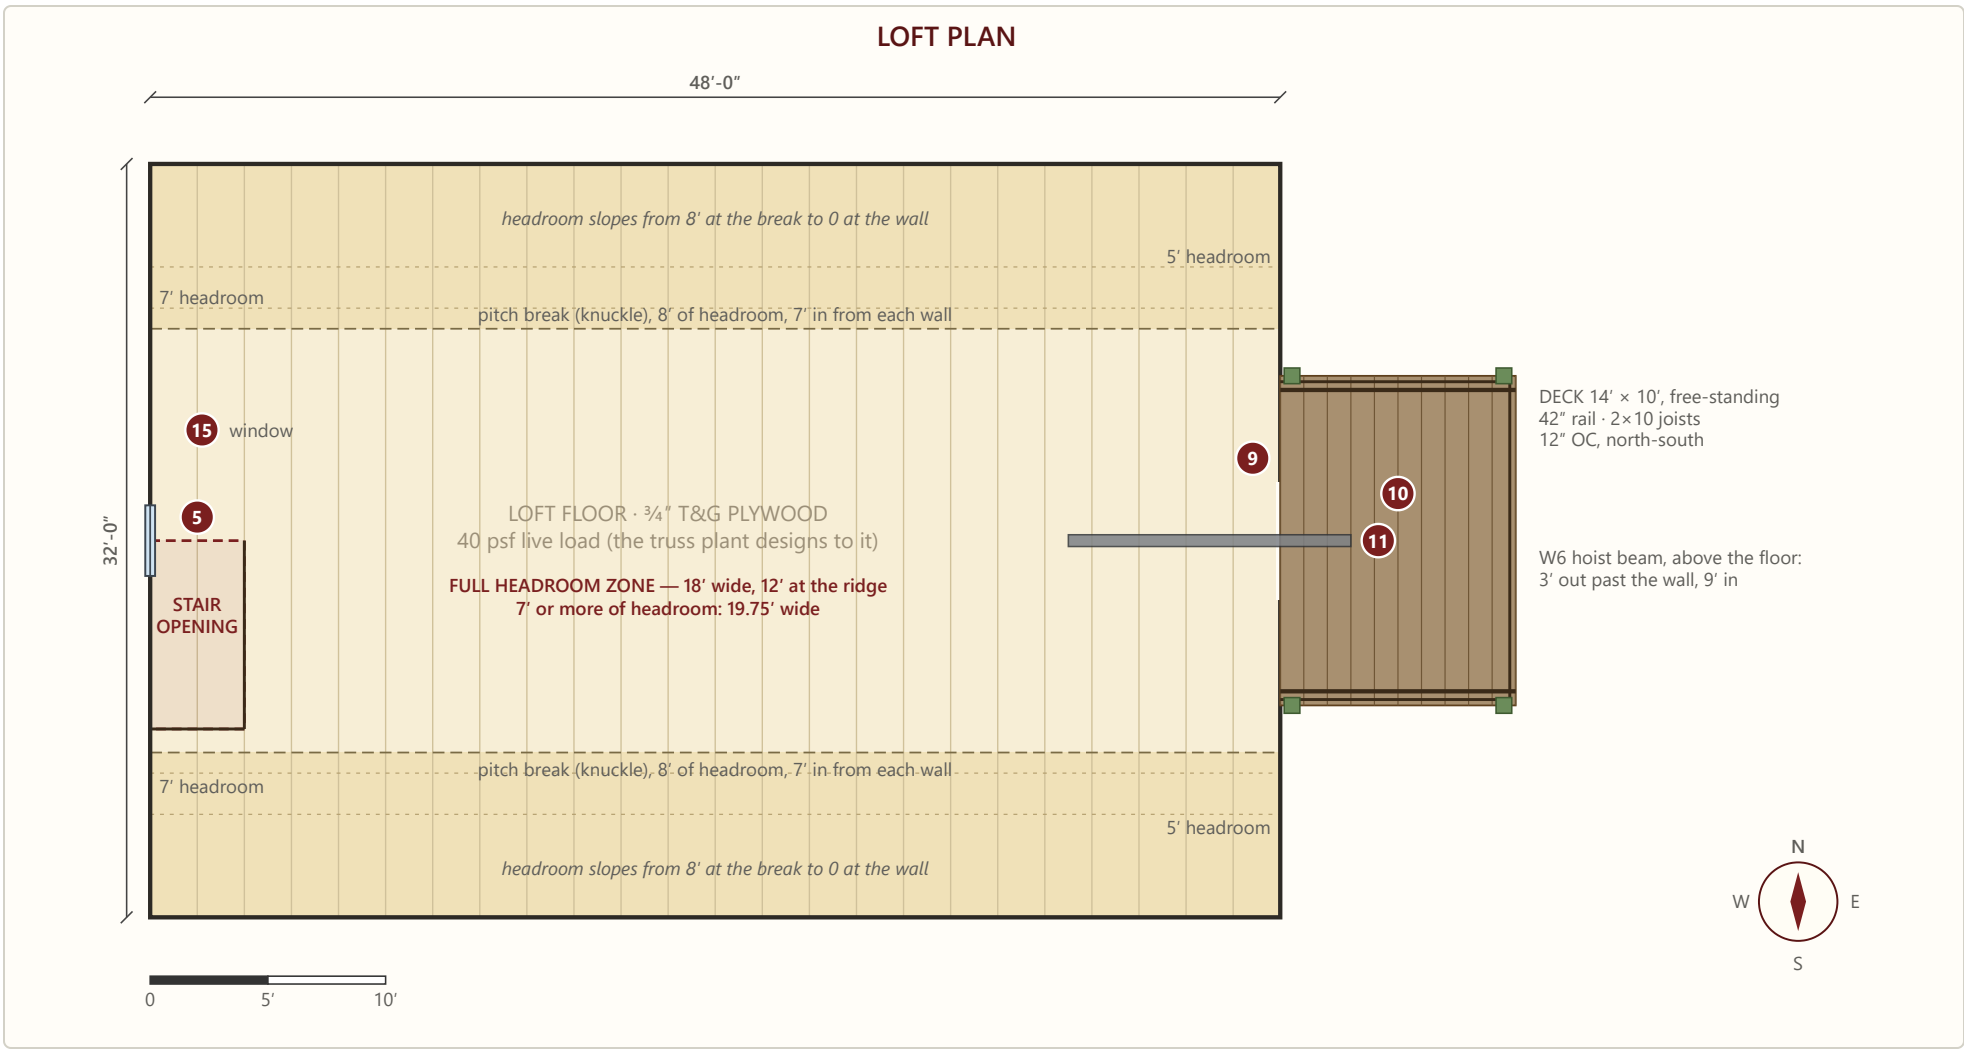


Loft plan. The stair opening is at the west wall, with the loft window centered in the west wall beside it; the loft double doors and the 14′ × 10′ landing deck are at the east end, and the hoist beam reaches about 3 ft past the doors. Headroom falls from the pitch-break line toward each sidewall: about 950 sq ft of the loft has 7 ft or more of headroom.

East Elevation (Front)

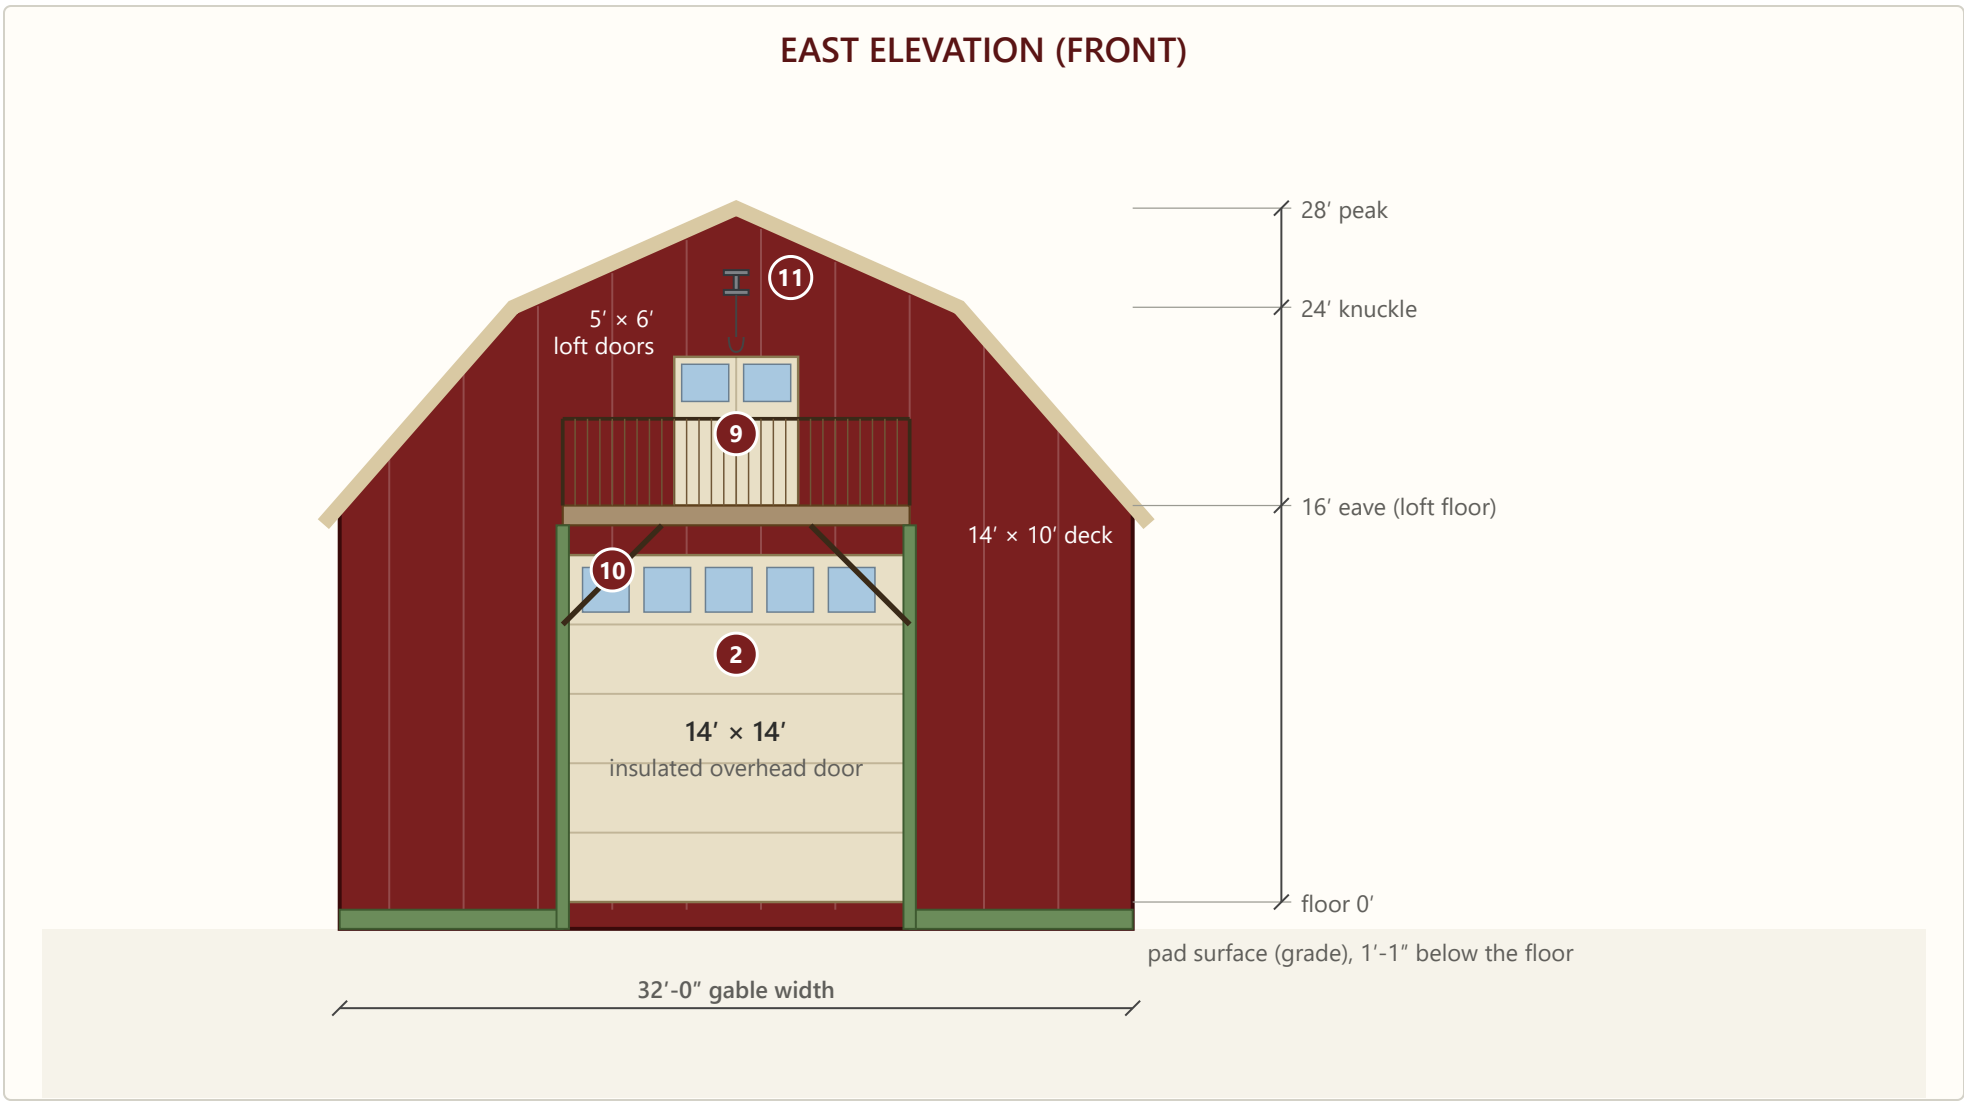


East (front) elevation. The gambrel gable wall with the 14′ × 14′ overhead door, the loft double doors above it, the 14′ × 10′ deck on free-standing posts, and the hoist beam seen end-on. The deck posts stand on the door-jamb lines.

West Elevation (Back)

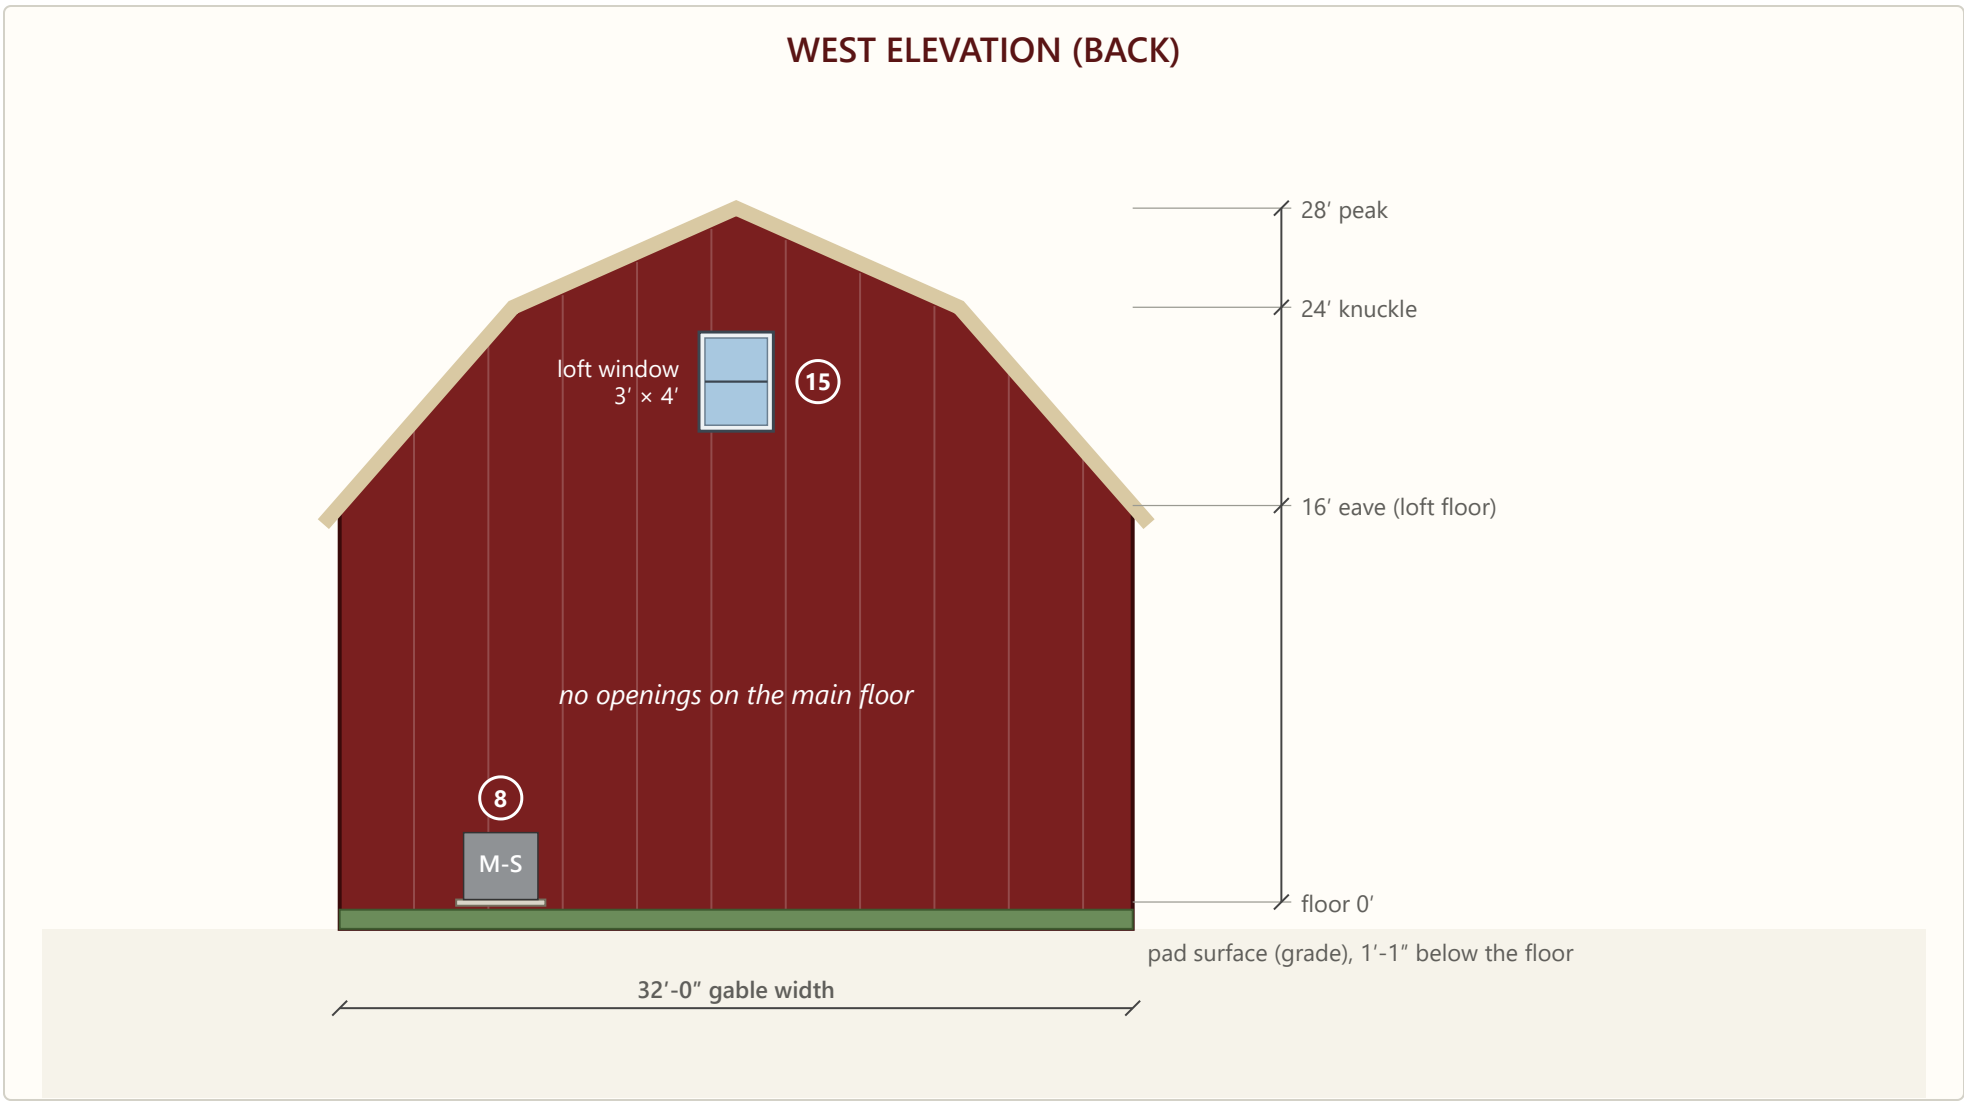


West (back) elevation. A gambrel gable with one window at the loft (marker 15), centered, and no openings on the main floor. The mini-split condenser is shown at the base; the owner may put it on the south wall instead.

North Elevation (Left Sidewall)

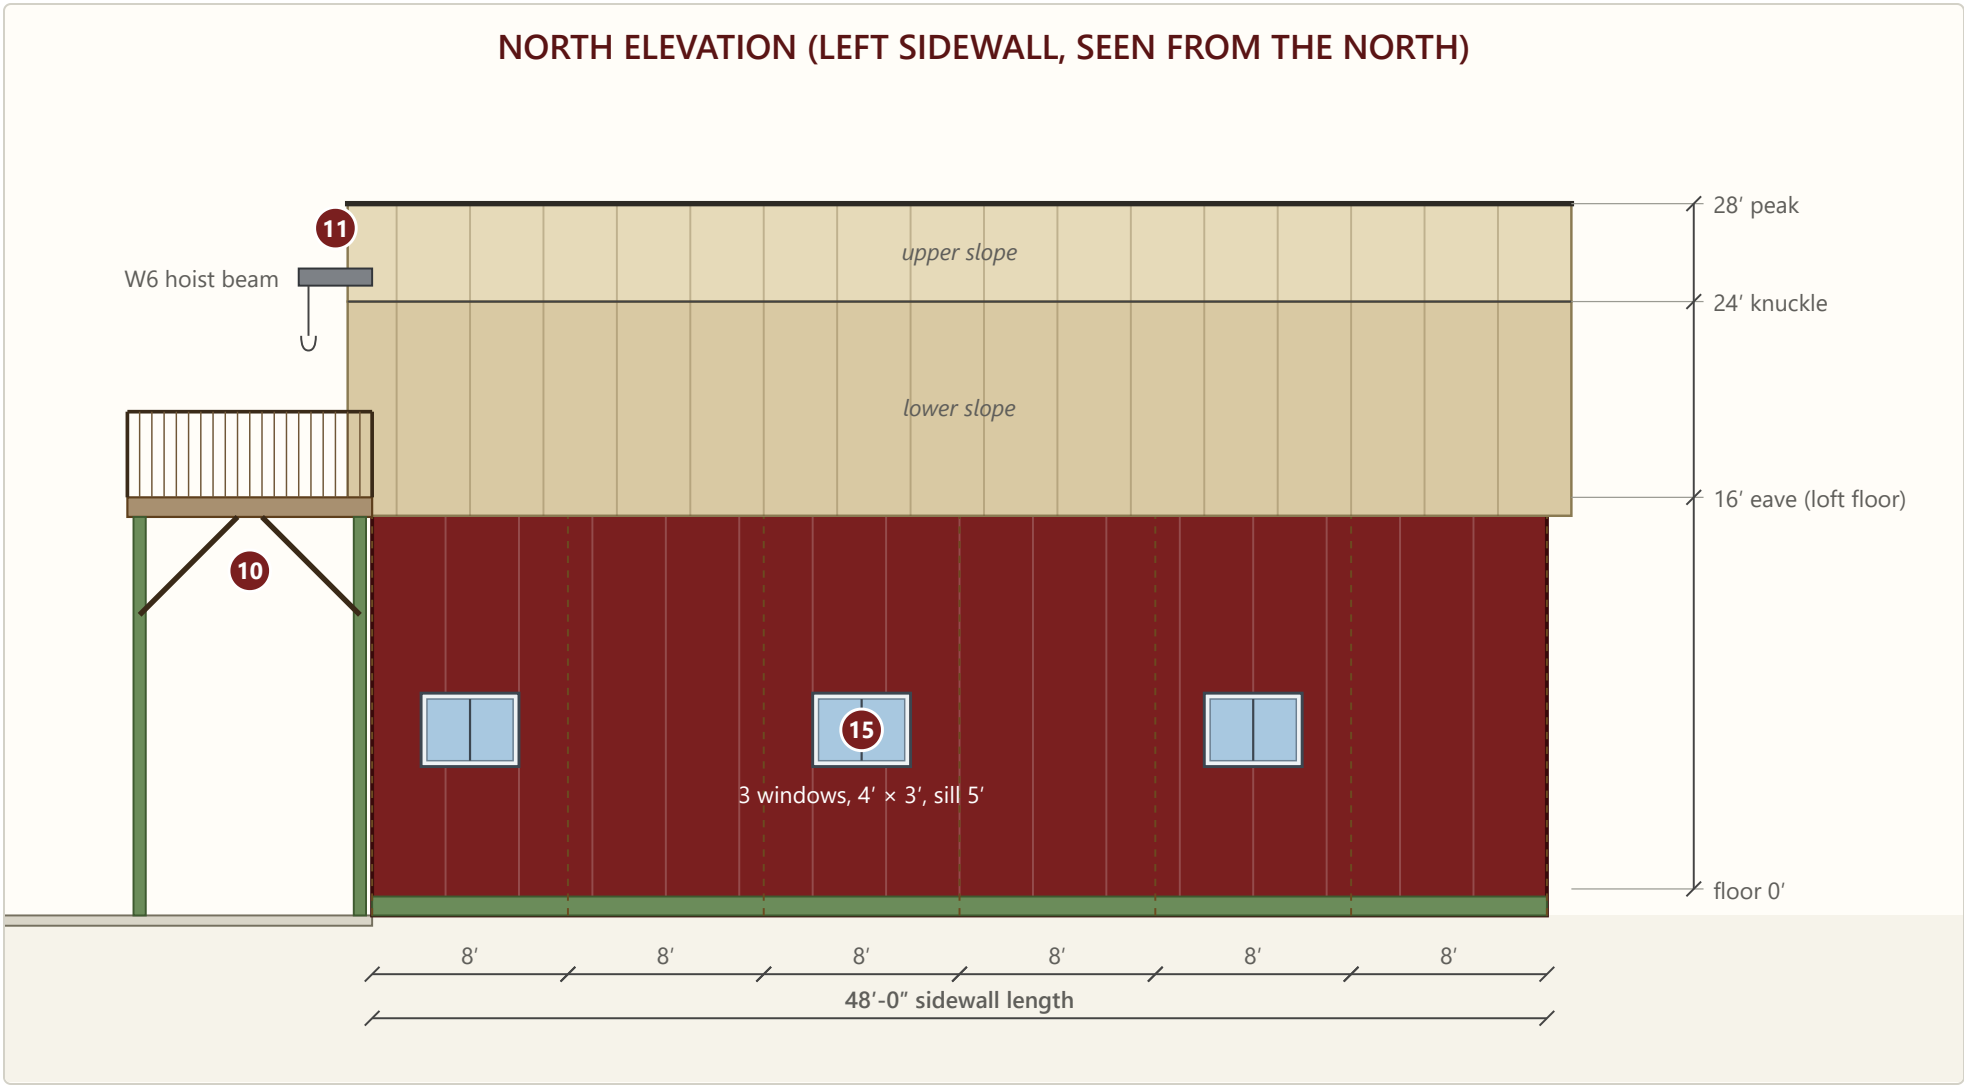

North sidewall, seen from the north, so east is on the left. Three windows (marker 15), in bays 2, 4, and 6 counted from the west end; the rest is plain steel. The dashed lines are the post locations behind the siding. The deck and the hoist beam show at the east end.

South Elevation (Right Sidewall)

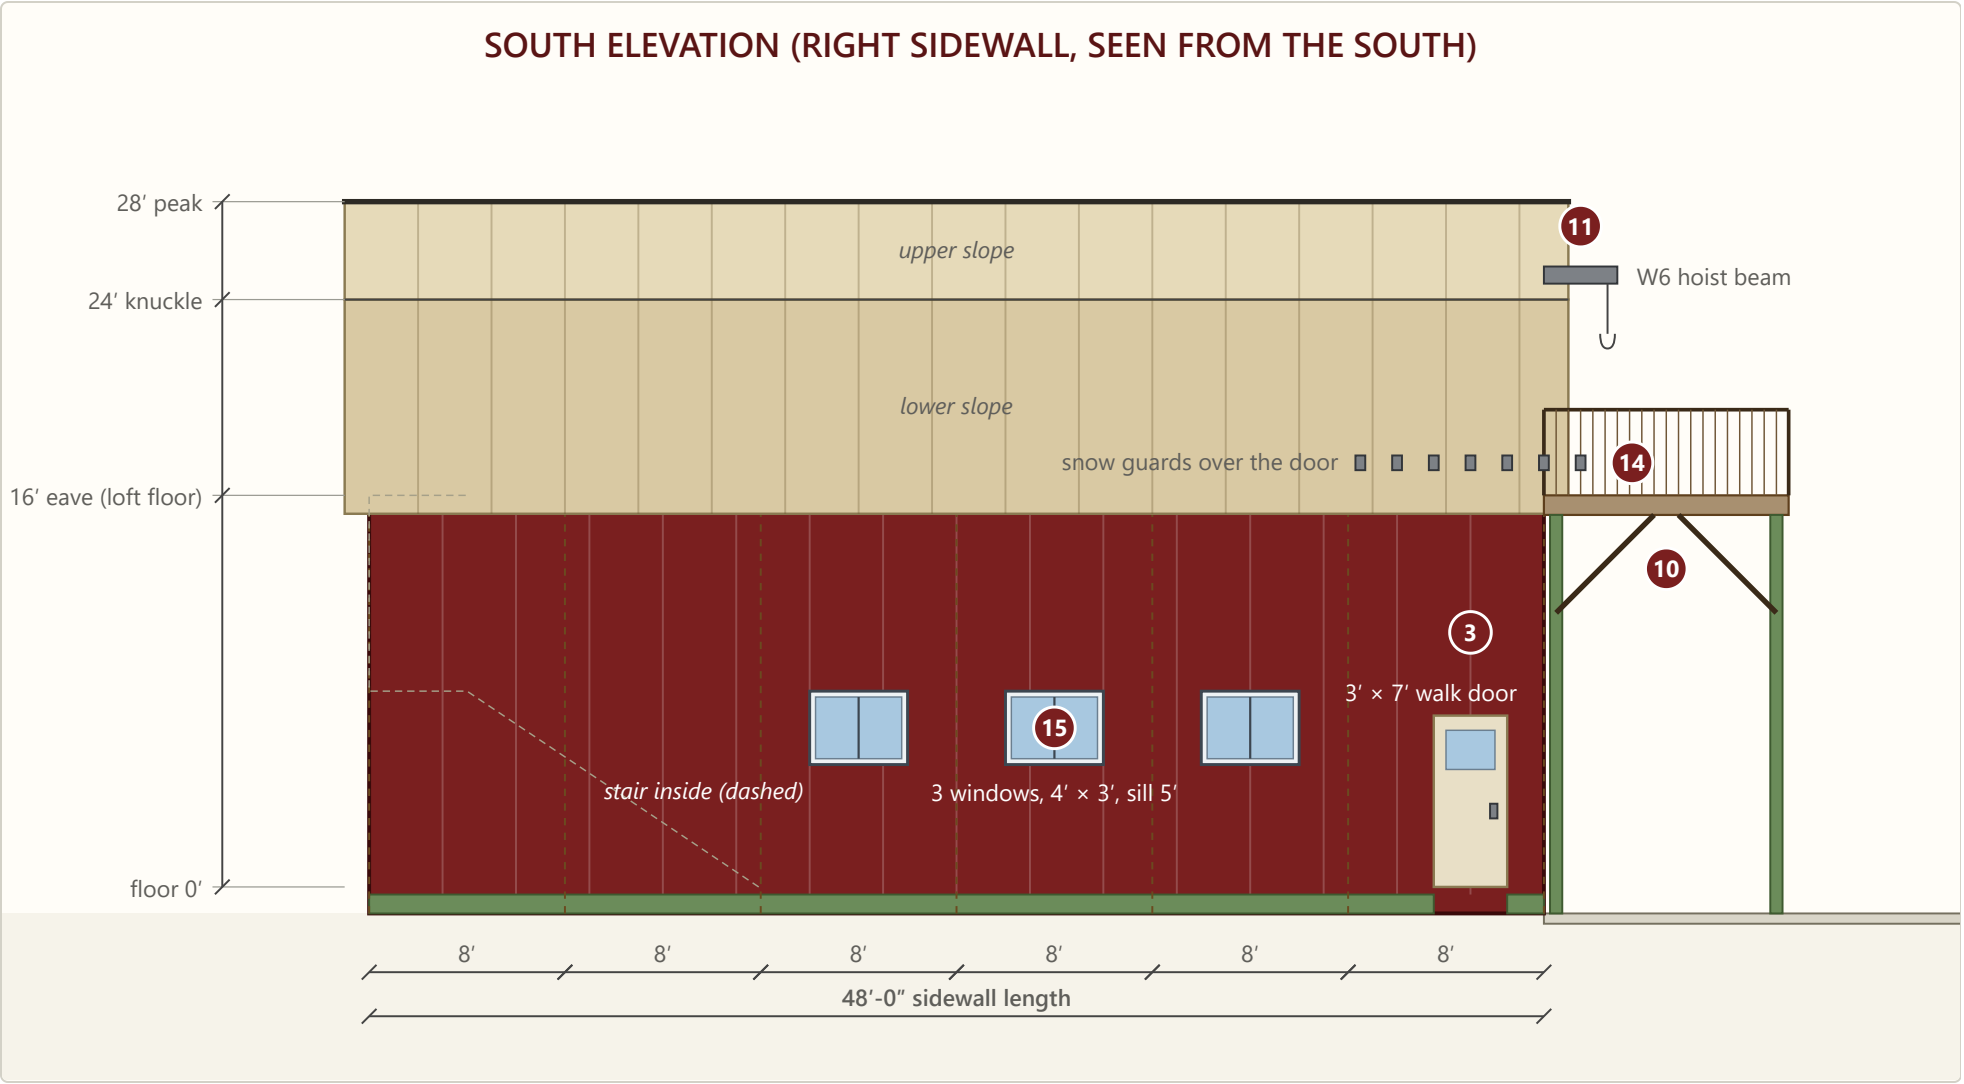

South sidewall, seen from the south, so west is on the left. Three windows (marker 15) in bays 3, 4, and 5, with none at the west end, where the stair is. The 3070 walk door is near the east end, well clear of the first stair flight (dashed, inside) and of the last window. The snow guards sit on the lower slope over the door.

Mountain Prairie Acres · Workshop pole barn plans and elevations · updated October 23, 2026 · drawn from `docs/workshop_model.js`.